



TBS2663 H265/H.264 SDI USB VIDEO/AUDIO RS485 Decoder


HEVC & AVC | SDI Audio Decode | SDI Video Decode

TBS2663 is a SDI HD decoder, which support H.265/H.264 audio and video decode, it' s IP input (supports IP(RTMP/RTMPS/ RTSP/ RTP/ HTTP/ HLS/ UDP/SRT), MPEG2, MPEG4) and has a SDI , a USB and RS485 ouput. TBS2662 is a decoder engine with the ability to decode videos up to 1080p 60fps video, compatible with multi-protocols, supports H.264/H.265/MPEG-1/MPEG-2/MPEG-4/VP8/VP9/AVS /AVS+ video decode, AAC/MP3/G.711 audio format.

TBS2663 video decoder is widely applied education, health care, IPTV, conference, remote education, news interview, banking, transportation, and other industries.

Key features:

- Embedded hardware
- Support 4 screens at the same time
- Support RS485 output,IO Input/Output
- Control multi encoder based on one computer
- RTMP/ RTMPS/RTSP/ RTP/ HTTP/HTTPS/ HLS/ UDP/SRT/P2P
- Output: SDI/USB2.0/AUDIO/RS485/IO
- Up to 1080 60 FPS output
- Multi-IP In (1. 4).
- Output Up to SDI HD/3G
- low consumption

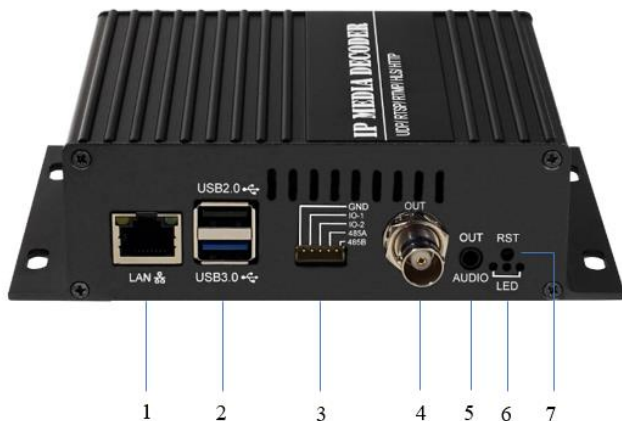

1- Ethernet port
2- USB2.0/ 3.0
3- RS 485
4- SDI output

5- Audio out
6- LED indicators
7- Reset





Specifications:

Model	TBS2663	
Output	1×SDI, 1×USB, 1×audio, 1×RS485, IO in/output	
Input	IP(RTMP/RTMPS/ RTSP/ RTP/ HTTP/ HLS/ UDP/SRT), MPEG2, MPEG4	
Video	Output Resolution	Maximum 1080 60 Fps
	Decoding	H.264/H.265/MPEG-1/MPEG-2/MPEG-4/VP8/VP9/AVS/AVS+
	IP IN	1, 4
	Protocol	rtsp/ http/ udp/ rtmp/rtmps/srt/ hls/ rtp/p2p
AUDIO	Output	1×3.5mm independent audio/SDI embedded audio/1×USB2.0
	Format	AAC/MP3/G.711
IP Input	1× RJ 100M/1000M, TCP, UDP	
System	Configure	IE, remote upgrade
Other	Power	5V~2A
	Consumption	5W
	Size	119mm x 102mm x 42mm
	working temperature	-20°C+ 60°C
	working humidity	<90%
	Weight	0.3KG

