




## TBS690A

### 4 Input DVB-ASI Video Capture Card

**TBS690A** is a DVB-ASI video capture card with 4 channels input, which used to receive DVB transport streams, and the transport streams can be single programs or multi programs. TBS690A is ideal for high-density applications requiring up to four ASI inputs, the input channels can run independently. With minimal power consumption, TBS690A is tailored for industrial applications where reliability is an option.

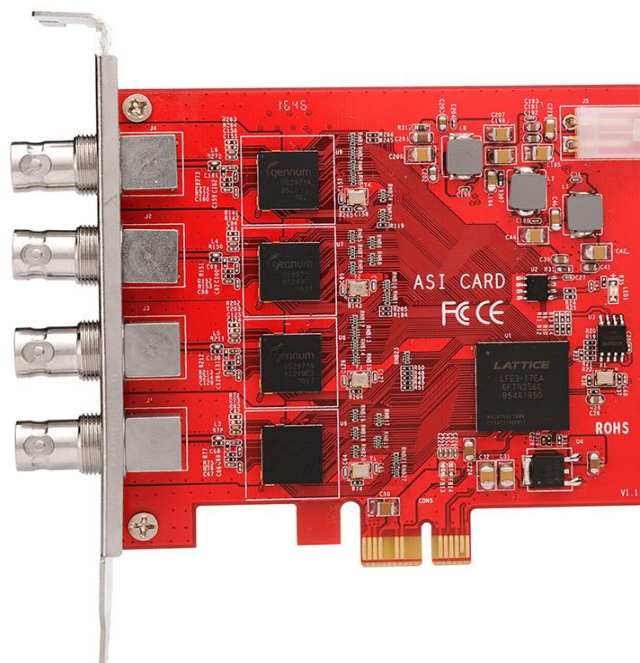

#### Main Features:

- DVB-ASI input
- Compatible with DVB Standard
- Four receiver channels on the same PCI-e card
- Bandwidth can be divided as required between the ports
- Signal quality sensing support in hardware

#### Applications:

- IPTV Servers
- ASI to IP conversion
- Datacasting and monitoring
- Electronic Program Guides (EPG's)
- Broadcast TV



## TBS690A

### Specifications:

Model	TBS690A
Interface	PCI-E x1
Input	4x ASI embedded Video/Audio
Form Factor	Standard-height
Connector	BNC
Data input	DVB-ASI Transport Stream (MPEG-2, H.264, HEVC/H.265 or JPEG2000 compliant transport stream)
Video Formats	DVB ASI Coaxial, DVB Transport Stream
Video Interfaces	DVB-ASI at 270Mb/s
Receive FIFO Size	4 KB per channel
OS and Driver	Linux
Power	12V & 10W
temperature	0~60°C
Dimension	11.5*12*2.1cm
Weight	120g